


# SUNRIDGE

## 74XX1- SERIES: FOUR WALL HEADER, EDGE-STRADDLE MOUNT

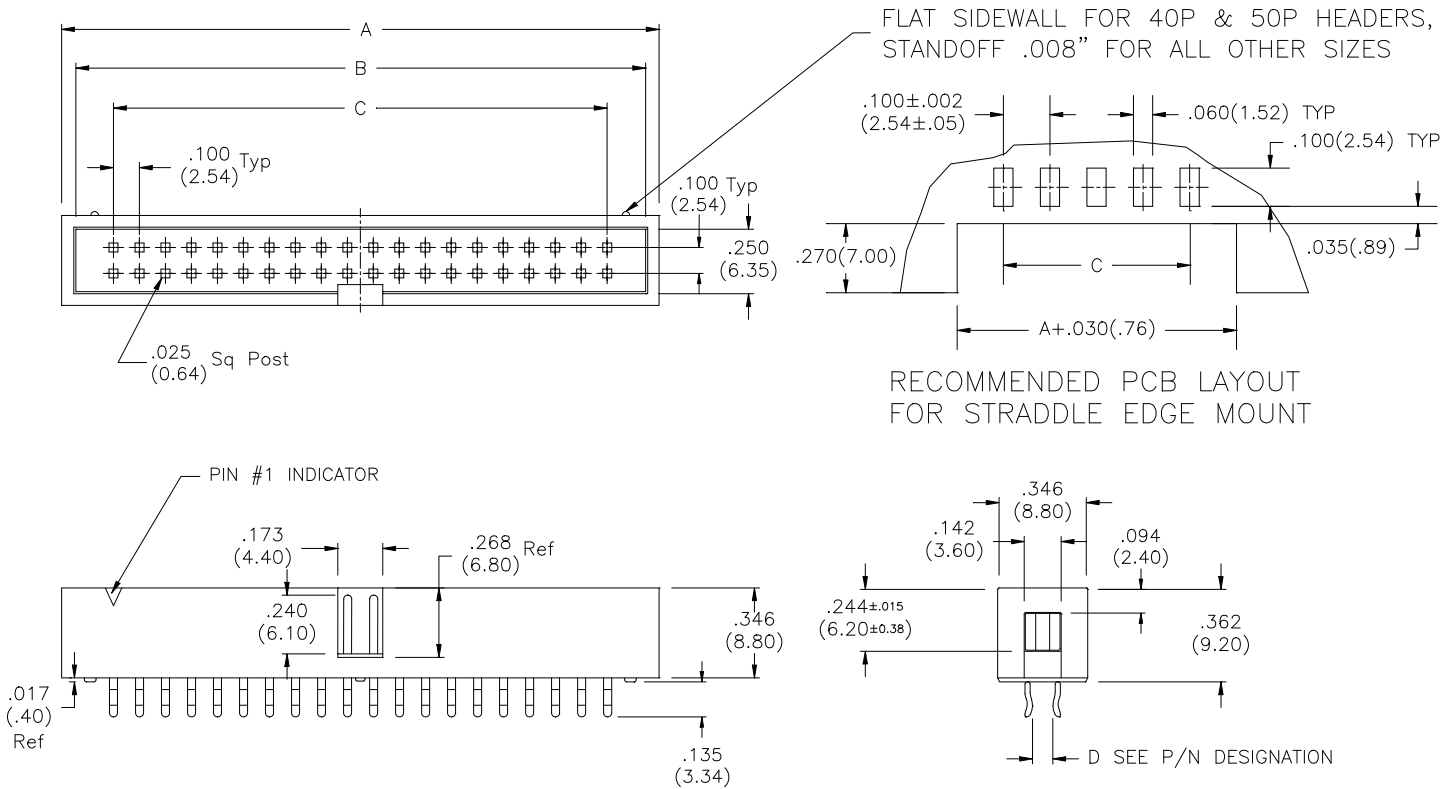

### P/N DESIGNATION

74   1-    -

1      2      3      4      5

- 1: NO. OF CONTACT
- 2: HOUSING MATL (FOR 40P & 50P HEADERS):
  - 0: PBT (FOR WAVE SOLDERING)
  - 1: PPS (FOR IR SOLDERING)
- 3: STRDDLE MOUNT SPACING:
  - "D "DIMENSION:
  - 0: .053 " (FOR .062 "THICK BOARD)
  - 1: .062 "
  - 2: .024 " (FOR .032 "THICK BOARD)
- 4: GPLD PLATING THICKNESS OPTIONS:
  - T: TIN PLATED
  - 0: GOLD FLASH
  - 2: 10 u" GOLD
  - 3: 15 u" GOLD
  - 6: 30 u" GOLD
- 5: CONFIGURATION OPTION
  - BLANK: STANDARD CONFIGURATION AS SHOWN
  - 01: PIN #20 VOIDED (FOR 40 PIN HEADER)
  - 02: AND UP: RESERVED FOR OTHER CUSTOM OPTIONS.

NO. OF POSITION	BASIC P/N	DEMENSIONS IN (MM)		
		A	B	C
10	74101-	.800(20.32)	.700(17.78)	.400(10.18)
14	74141-	1.000(25.40)	.900(22.86)	.600(15.24)
16	74161-	1.100(27.94)	1.000(25.40)	.700(17.78)
20	74201-	1.300(33.02)	1.200(30.48)	.900(22.86)
24	74241-	1.500(38.10)	1.400(35.36)	1.100(27.94)
26	74261-	1.600(40.64)	1.500(38.10)	1.200(30.48)
30	74301-	1.800(45.72)	1.700(43.18)	1.400(35.58)
34	74341-	2.000(50.80)	1.900(48.26)	1.600(40.64)
40	74401-	2.300(58.42)	2.200(55.86)	1.900(48.26)
50	74501-	2.800(71.12)	2.700(68.58)	2.400(60.96)
60	74601-	3.000(83.82)	3.200(81.28)	2.900(73.66)
64	74641-	3.500(88.90)	3.400(86.36)	3.100(78.74)