76- SERIES

.100" (2.54MM) CENTERLINE UNSHROUDED PIN HEADER, R/A, STANDARD HOUSING PROFILE

-Size in 1 to 40 pins/per row, in single, dual and triple rows

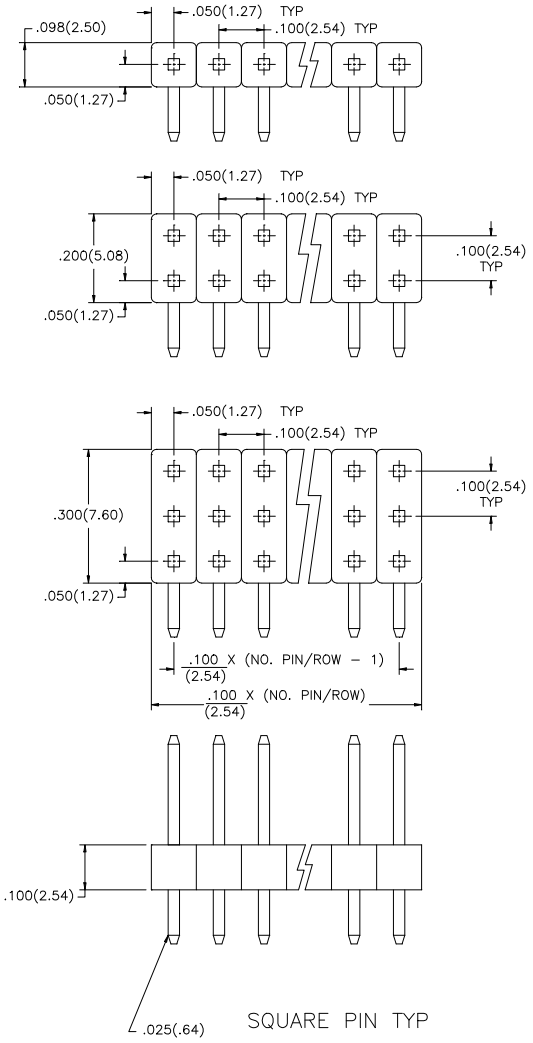

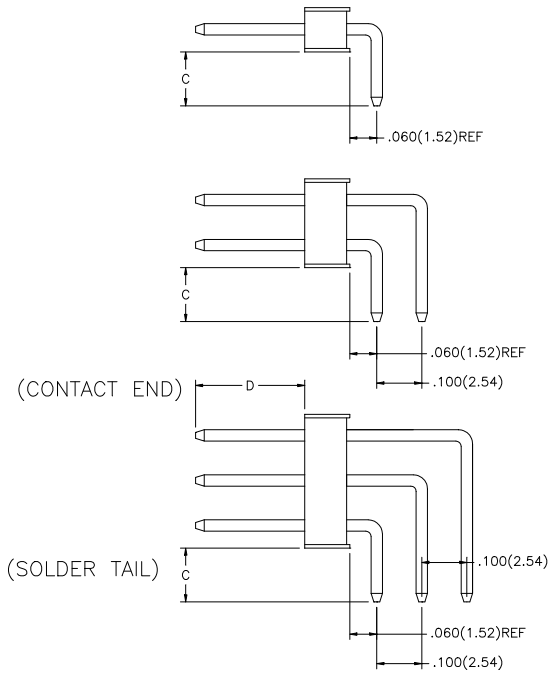

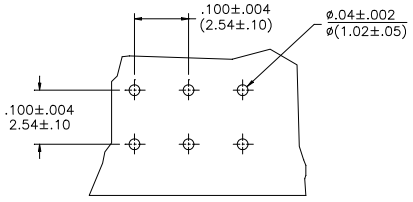

RECOMMENDED PCB LAYOUT

P/N DESIGNATION

76-□□□□-□□□

1 2 3 4 5

1: HOSING MATL-
- 0: PBT
- 1: PCT

2: NUMBER OF ROWS
- S: SINGLE ROW
- D: DUAL ROWS
- T: TRIPLE ROWS

3: NUMBER OF TOTAL CONTACTS

4: PLATING OPTION
- T: ENTIRE CONTACT TIN PLATED
- 0: GOLD FLASH ON CONTACT END
- 2: 10 u" GOLD ON CONTACT END
- 3: 15 u" GOLD ON CONTACT END
- 6: 30 u" GOLD ON CONTACT END

5: PIN CONFIGURATION

SOLDER TAIL "C" DIM	CONTACT END "D" DIM
01 .105" (2.68mm)	.237" (6.00mm)
02 .105" (2.68mm)	.318" (8.08mm)
03 SAME AS "01"EXCEPT SOLDER TAIL CRIMPED	

VARIETY OF CUSTOM OPTION AVAILABLE UPON REQUEAT

B FOR – 03 SUFFIX

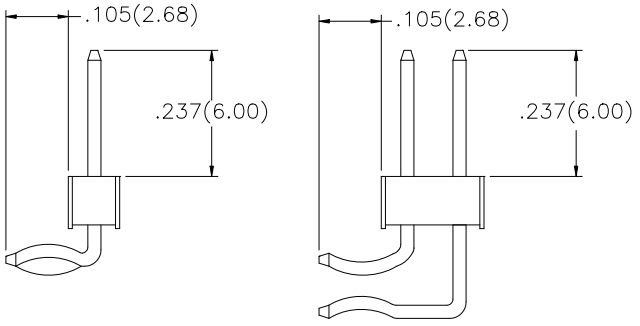

CRIMPED SOLDER TAIL AT SELECTIVE POSITIONS FOR BOARD RETENTION