18610- SERIES
VERTICAL MOUNT, THROUGH HOLE

-Sizes in 1 to 30 per row

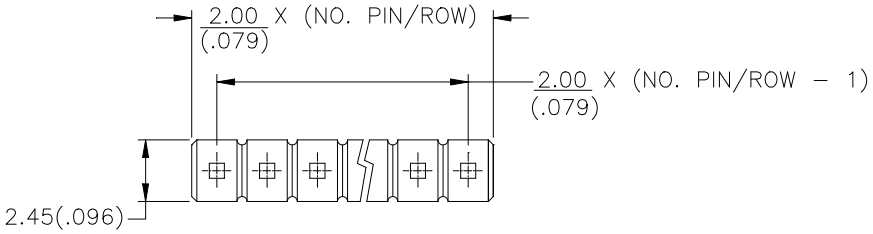



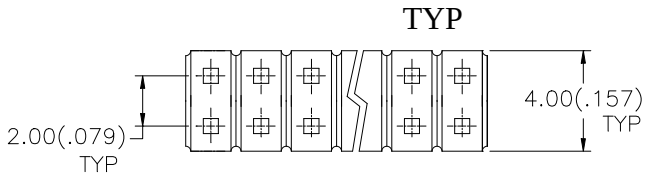

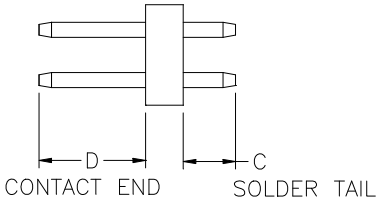

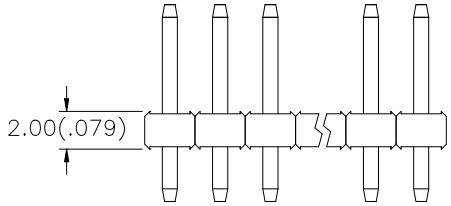

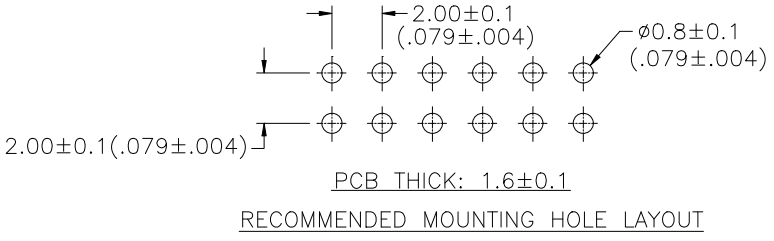

P/N DESIGNATION

186 10– □□□□ – □□□

1 2 3 4 5

1: HOUSING MATL- 0: PBT UL 94V-0, FOR SAVE SOLDERING
1: HIGH TEMP THERMAL PLASTIC, UL 94V-0, FOR IR SOLDERING

2: NUMBER OF ROWS- S: SINGLE ROW
D: DUAL ROWS

3: NUMBER OF TOTAL CONTACTS

4: PLATING OPTION
T: ENTIRE CONTACT TIN PLATED
0: GOLD FLASH ON CONTACT END
2: 10u" GOLD ON CONTACT END
3: 15u" GOLD ON CONTACT END
6: 30u" GOLD ON CONTACT END

5: PIN CONFIGURATION

	SOLDER TAIL "C" DIM	CONTACT END "D" DIM
01	3.00mm(.118")	4.00mm(.158")
02	2.50mm(.099")	4.00mm(.158")
03	1.50mm(.059")	4.00mm(.158")
04	.75mm(.030")	4.00mm(.158")

VARIETY OF CUSTOM OPTION AVAILABLE UPON REQUEST