18612- SERIES
RIGHT ANGLE MOUNT, THROUGH HOLE

-Sizes in 1 to 30 pre row

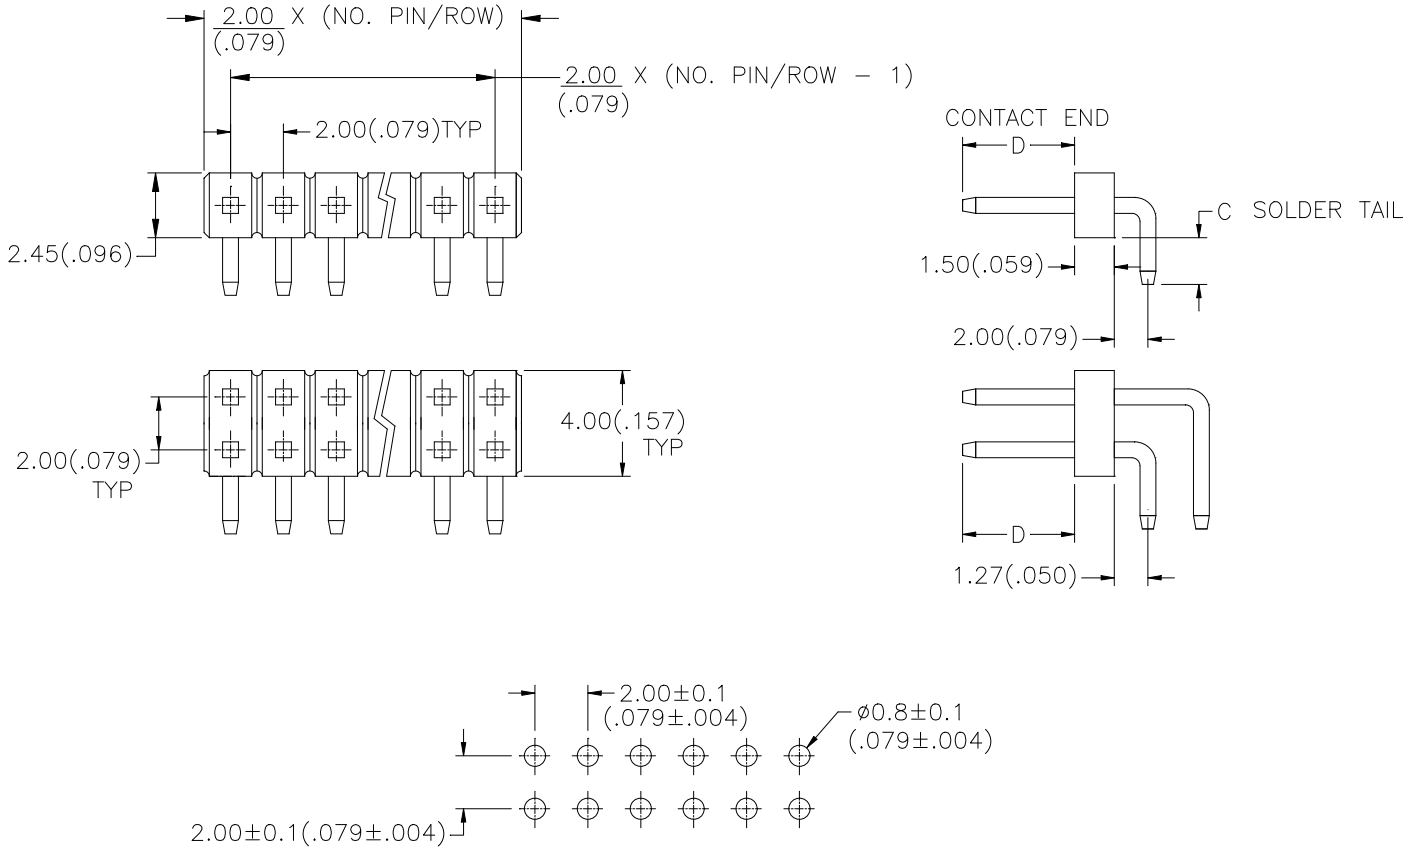

RECOMMENDED PCB LAYOUT

P/N DESIGNATION

18612– □□□□ – □□□

1 2 3 4 5

1: HOUSING MATL- 0: PBT UL 94V-0, FOR SAVE SOLDERING
1: HIGH TEMP THERMAL PLASTIC, UL 94V-0, FOR IR SOLDERING

2: NUMBER OF ROWS- S: SINGLE ROW
D: DUAL ROWS

3: NUMBER OF TOTAL CONTACTS

4: PLATING OPTION
- T: ENTIRE CONTACT TIN PLATED
- 0: GOLD FLASH ON CONTACT END
- 2: 10 u" GOLD ON CONTACT END
- 3: 15 u" GOLD ON CONTACT END
- 6: 30 u" GOLD ON CONTACT END

5: PIN CONFIGURATION

	SOLDER TAIL "C" DIM	CONTACT END "D" DIM
01	3.00mm(.118")	4.00mm(.158")
02	2.50mm(.099")	4.00mm(.158")
03	1.50mm(.059")	4.00mm(.158")

VARIETY OF CUSTOM OPTION AVAILABLE UPON REQUEST