
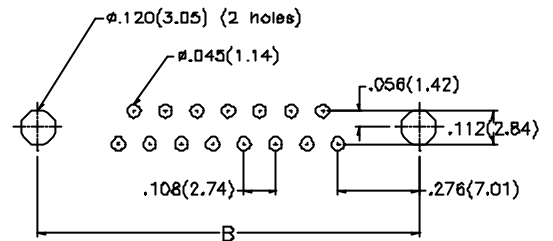
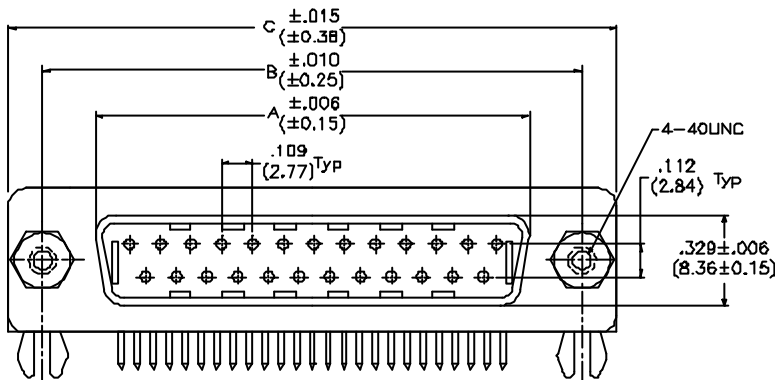


SUNRIDGE



46XX1-SERIES

RIGHT ANGLE MOUNT, .318" FOOT PRINT, PLUG

P/N DESIGNATION (REF TO PAGES 2,3 FOR DETAIL)

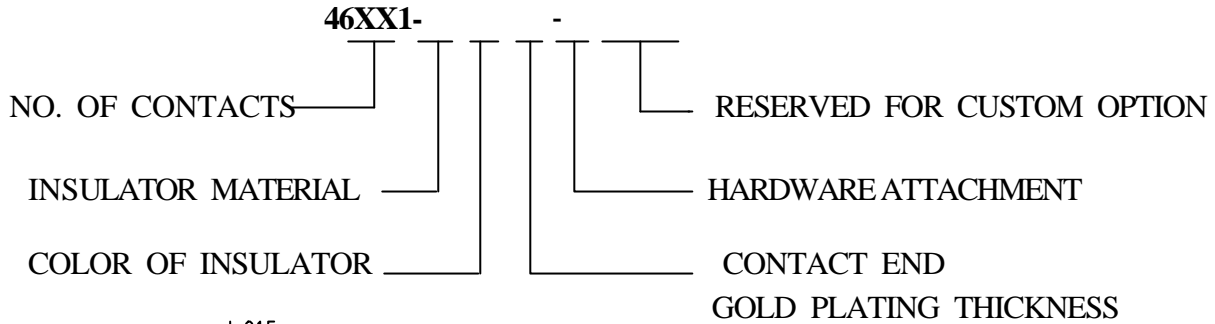

PCB LAYOUT REFERENCE

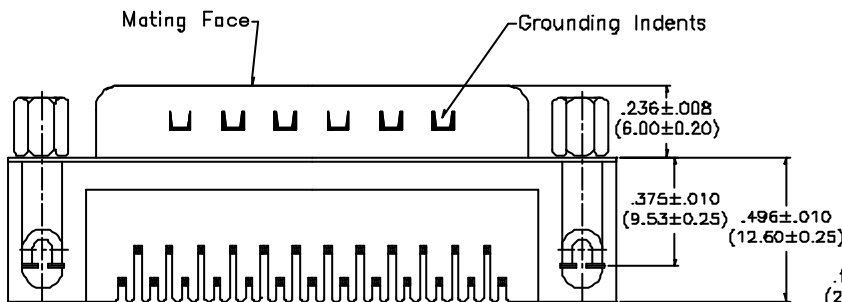

SPECIAL CONFIGURATION

P/N 46250- -1

DSUB 9P PLUG, R/A, W/THREAD INSERT & BOARD LOCK, WITH .395" MOUNTING PROFILE (DESIGNATED BY "-1" SUFFIX) FOR CLEARANCE

BASIC P/N	NO. OF CONTACT	DIMENSIONS IN (MM)		
		A	B	C
46091-	9	.666(16.92)	.984(24.99)	1.213(30.81)
46151-	15	.994(25.25)	1.312(33.32)	1.541(39.14)
46251-	25	1.534(38.96)	1.852(47.04)	2.088(53.04)
46371-	37	2.182(55.42)	2.500(63.50)	2.729(69.32)

